

Hiab Multilift

XR Power range hooklifts




TECHNICAL INFORMATION

XR30S

TECHNICAL DATA

TYPE	XR30S				
VEHICLE TYPE	4 axle				
GVW OF THE VEHICLE (t)	32 - 41				
CAPACITY (t)	30				
G-LENGTH	53	56	59	61	63
SYSTEM WEIGHT (kg) *	2770	2790	2850	2870	2910
TIPPING ANGLE (°)	52	53	55	52	49
MAX. OPERATING PRESSURE (MPa)	30				
RECOMMENDED MAX. OIL FLOW (l/min)	120 (special 150)				

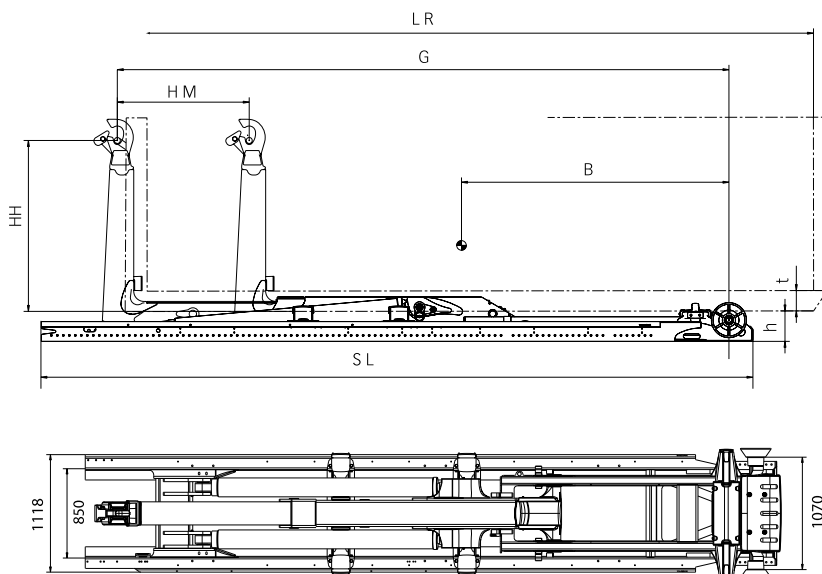

* Weight includes hydraulic body locking and excludes oil tank and oil.

** The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local Hiab Multilift dealer.

Hiab Multilift equipments meet the demands set forth in the EU Machine Directive and they are CE marked.

We reserve the rights for modifications. Illustrations do not always show an equipment in standard version.

PRIMARY DIMENSIONS

MODEL	XR30S.53	XR30S.56	XR30S.59	XR30S.61	XR30S.63
LR = BODY LENGTH (m) min - max	4,5 - 6,4	4,5 - 6,6	4,7 - 6,9	4,9 - 7,1	5,1 - 7,3
SL = SUBFRAME LENGTH (mm) **	6563	6563	6563	6583	6783
B = CENTRE OF GRAVITY (mm)	2900	3000	3100	3250	3400
G = EXACT G-LENGTH (mm)	5360	5560	5860	6080	6310
HM = HORIZONTAL MOVEMENT (mm)	1100	1300	1450	1450	1450
t = MIN. FREE TUNNEL HEIGHT (body) (mm)	105				
h = INSTALLATION HEIGHT (mm)	290				
HH = HOOK HEIGHT (mm)	1570				

Cargotec improves the efficiency of cargo flows on land and at sea – wherever cargo is on the move. Cargotec's daughter brands Hiab, Kalmar and MacGregor are recognised leaders in cargo and load handling solutions around the world. Cargotec's global network is positioned close to customers and offers extensive services that ensure the continuous, reliable and sustainable performance of equipment. www.cargotec.com



Cargotec Finland Oy
 Nesteentie 36, P.O.Box 39
 FI-21201 Raisio, Finland
 tel. +358 204 55 2399
 fax +358 204 55 2231
www.hiab.com